




# Gamela

Enterprise Co., Ltd.



Welcome to our site...

## AUTO AIR CONDITIONING TOOLS

A/C Flush Machine

### *A/C Flush Machine*



### **A/C Flush Machine**

[Flush Machine 59104, 59105, 59106](#)

[Flush Machine 59107, 59108, 59109](#)

[Flush Machine 59110](#)

### **GAMELA ENTERPRISE CO., LTD.**

5F., No.657-1, Zhongzheng Rd.,  
Xinzhuang Dist., New Taipei City 242, Taiwan

TEL: 886-2-29013211 FAX: 886-2-29042386

E-mail : [gamela@ms2.hinet.net](mailto:gamela@ms2.hinet.net)

Website: <http://www.gamela.com.tw>

Copyright 2013 **Gamela Enterprise Co., Ltd.**

## Automatic Circulation

### 自動循環式

#### Features:

- The power comes from pneumatic motor and air pressure-no sparkles and safety.
- The air bubbles can be added to boost the cleaning effect, and the mud inside the cooling pipes can be thoroughly removed. It effectively removes and cleans the impurities inside the cooling pipes.
- Double filter design, dirt inside tube can be filtered out and is visible.
- The best design is the circulation of cleaner. Clean A/C system again and again.
- The leakage of the system can be easily detected by liquid pressure or air pressure.
- After cleaning, the lives of the compressor and the cooling system can be effectively extended. This maintenance procedure is highly recommended.
- Match Cleaner with Universal Connector to achieve high efficiency.
- Automatic Circulation is the most professional specialty.

Patent No. 266436

59104



# The joints of the system pipes can be disassembled for convenience and high efficiency.

59105



59106



Unit: mm & kgs Pressure: kg/cm<sup>2</sup>


Model	59104	59105	59106
Capacity	2L	4L	2L
Used Pressure	5~7		
Power	Air Pressure/AP-35		
Machine Size	450x340x900	520X520X900	430X600X1200
Discharge Style	Air Pressure		
Packaging	4.5'	5.5'	8.2'
Net Weight	18	23	34
Gross Weight	20.5	25	36



## 59104 & 59105 Automatic A/C Flush Machine.

- |                                  |                                     |
|----------------------------------|-------------------------------------|
| 1. handle                        | 13. cleaning agent delivery tube    |
| 2. refilling entrance            | 14. tool room                       |
| 3. muffler                       | 15. cleaning agent exit-1           |
| 4. 3/8" oil cup                  | 16. cleaning agent collecting tube  |
| 5. 100*-filter                   | 17. oil feeder                      |
| 6. starting to flush inlet valve | 18. air filter                      |
| 7. pressure gauge                | 19. cleaning agent collecting valve |
| 8. throttle button               | 20. pressure gauge                  |
| 9. air inlet valve               | 21. 2L transparent storage tank     |
| 10. air inlet                    | 22. 1 $\mu$ filter                  |
| 11. foam throttle button         | 23. 5" filter cup                   |
| 12. cleaning agent outlet valve  | 24. the top of 1 $\mu$ filter cup   |
|                                  | 25. cleaning agent exit-2           |

If use high strong corrosive solvent to damage the machine, it will not be under our warranty.

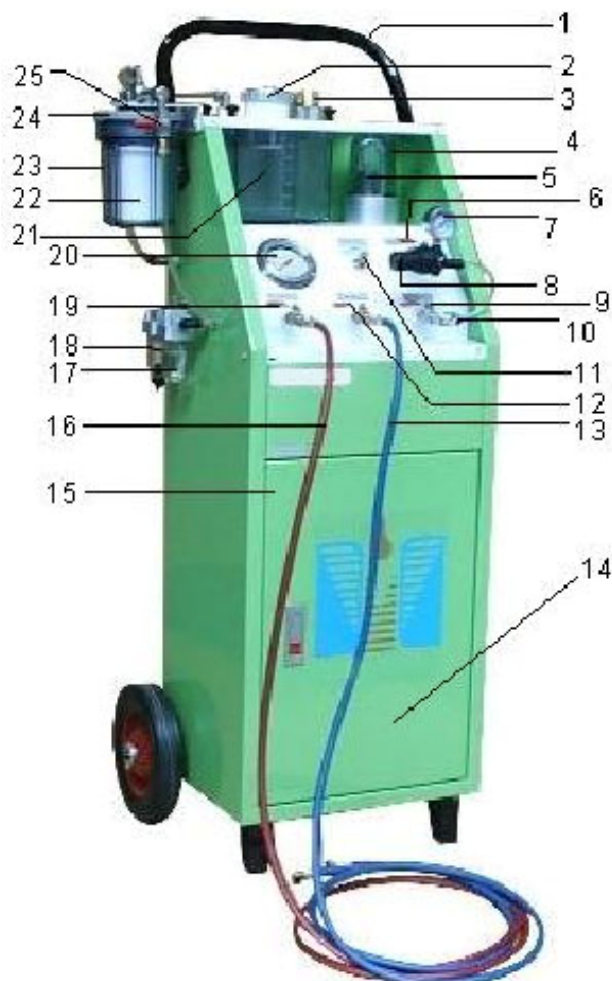

## 59106 Automatic A/C Flush Machine.

- |                                  |                                     |
|----------------------------------|-------------------------------------|
| 1. handle                        | 13. cleaning agent delivery tube    |
| 2. refilling entrance            | 14. tool room                       |
| 3. muffler                       | 15. cleaning agent exit-1           |
| 4. 3/8" oil cup                  | 16. cleaning agent collecting tube  |
| 5. 100*-filter                   | 17. oil feeder                      |
| 6. starting to flush inlet valve | 18. air filter                      |
| 7. pressure gauge                | 19. cleaning agent collecting valve |
| 8. throttle button               | 20. pressure gauge                  |
| 9. air inlet valve               | 21. 2L transparent storage tank     |
| 10. air inlet                    | 22. 1 μ filter                      |
| 11. foam throttle button         | 23. 5" filter cup                   |
| 12. cleaning agent outlet valve  | 24. the top of 1 μ filter cup       |
|                                  | 25. cleaning agent exit-2           |

If use high strong corrosive solvent to damage the machine, it will not be under our warranty.

## Semi-Automatic Circulation

### 半自動循環式

#### Features:

- By air pressure-no sparkles and safety.
- Use the air pressure to take away dirt inside the A/C pipe circuit.
- Double filter design, filter out dirt of inside tube and it is visible.
- The best design is the circulation of cleaner. Clean A/C system again and again.
- The leakage of the system can be easily detected by liquid pressure or air pressure.
- After cleaning, the lives of the compressor and the cooling system can be effectively extended. This maintenance procedure is highly recommended.
- Match Cleaner with Universal Connector to achieve high efficiency.
- It is very easy to operate.

Patent No>272958



# The joints of the system pipes can be disassembled for convenience and high efficiency.

## A Simple Flush Tank

### 簡易清洗桶

- 59107 has improvements over traditional A/C pipe cleaning tool.

59107



Each carton contains 6 sets,  
Packaging size is 2.1'  
with G.W. 20.  
The carton size is 470x410x300



59108



59109

Unit: mm & kgs Pressure: kg/cm<sup>2</sup>

Model	59107	59108	59109
Capacity		2L	10L for bus
Used Pressure	5~7		
Power	Air pressure		
Machine Size	155 x 200 x 290	300 x 230 x 600	460 x 360 x 1000
Packaging	0.3'	1.7'	6'
Net Weight	2.5	7	24
Gross Weight	3	8	26

## A/C Universal Connectors 冷氣萬用接頭



59110

- Include of necessary connector that fit of type of cars.

