


Charger, Socket & Meter

Description	AES P/N	Picture	Description	AES P/N	Picture
Power Socket	AES-1118S-P011 Input: 12VDC 20A/24VDC 15A OD: 29 mm		Cigarette Socket	AES-1118S-C004 Input: 12VDC 10A OD: 29mm	
	AES-1118S-M015 Input: 12VDC 20A/24VDC 15A OD: 29 mm		Voltmeter Socket	AES-1118S-V010A 6V~30VDC AES-1118S-V010A-2 6V~60VDC OD: 29mm (Red/Blue/Green/Amber)	
	AES-1118S-EL Engle Socket Input: 12VDC 20A/24VDC 15A OD: 29mm			AES-1118S-DV12 5V~15VDC, Blink after 15V DC AES-1118S-DV24 5V~30VDC, Blink after 30V DC	
	AES-1118S-G036 Input: 12VDC 20A/24VDC 15A OD: 18mm			AES-1118S-VA010 Input: 12V~24VDC Rating: 8V~60VDC OD: 29mm	
USB Charger Socket	AES-1118S-U013 Input: 12~24VDC, 2 ports Output: 5V 2.1A/port, Total: 3.1A OD: 29mm		Amerage Meter Socket	AES-1118S-VL-2 10VDC~60VDC	
	AES-1118S-UA013 Input: 12~24V DC, 2 ports Output: 5A 2.1A/port, Total: 3.1A OD: 29 mm			AES-1118S-A010 0A~10A (Red/Blue/Green/Amber)	
	AES-1118S-UB013 Input: 12~24V DC 1 port, Output: 5V 2.4A AES-1118S-UB013-2 2 ports, Output: 5V 2.4A+2.4A OD: 29 mm			AES-1118S-AA010 Input: 12VDC Rating: 0A~100ADC OD: 29mm	
Temp Meter Socket	AES-1118S-UC013 Input: 12~24VDC 1 port, Output: 5V 2.4A AES-1118S-UC013-2 2 ports, Output: 2.4A+2.4A OD: 29 mm		Voltage/Amerage Meter Socket	AES-1118S-B010 6V~30V DC 0A~10A DC OD: 29mm (Red/Blue/Green/Amber)	
	AES-1118S-UD010 12~24VDC, 1 port Output: 5V 2.1A with Aux port OD: 29 mm			AES-1118S-T010 12~24VDC, 1 port Input: 12V~24VDC Rating: -40~125°C OD: 29mm	
	AES-1118S-JE015 Input: 12~24VDC, 2 ports Output: 5V, 2.4A+2.4A OD: 29 mm		Rocker Switch	AES-1118S-R001 12VDC 10A/24VDC 6A OD: 29mm	
	AES-1118S-JE015H AES-1118S-JE015P			AES-1118S-UL007 Input: 12~24VDC, 2 ports Output: 5A 2.1A/port, Total: 3.1A	
	AES-1118S-JF01F Input: 12~24VDC, 2 Ports: - 5V 2.4A DC - QC3.0(3.6V~12V MAX 18W) OD: 29 mm		USB Charger (Rectangle Type)	AES-1118S-ULB Input: 12~24V DC, 2 ports Output: 5A 2.1A/port, Total: 3.1A	
	AES-1118S-JG01G 12~24VDC, 2 Ports: - QC3.0(3.6V~12V MAX 18W) - QC4.0(5V~20V MAX 36W) OD: 29 mm			AES-1118S-UD016 Input: 12~24V DC, 1 port Output: 5A 2.1A/port, Total: 3.1A with Aux port	
	AES-1118S-JH013 Input: 12V~24VDC, 2 ports Output: 5V 2.4A+2.4A OD: 29 mm			AES-1118S-ULA013 Input: 5VDC~30VDC, 2 ports Output: 5A 2.1A/port, Total: 3.1A with Voltage meter	
	AES-1118S-JI013 Input: 12V~24VDC Output: 5V 2.4A DC With Power-Off Switch OD: 29 mm		USB Charger + Voltage Meter (Rectangle Type)		

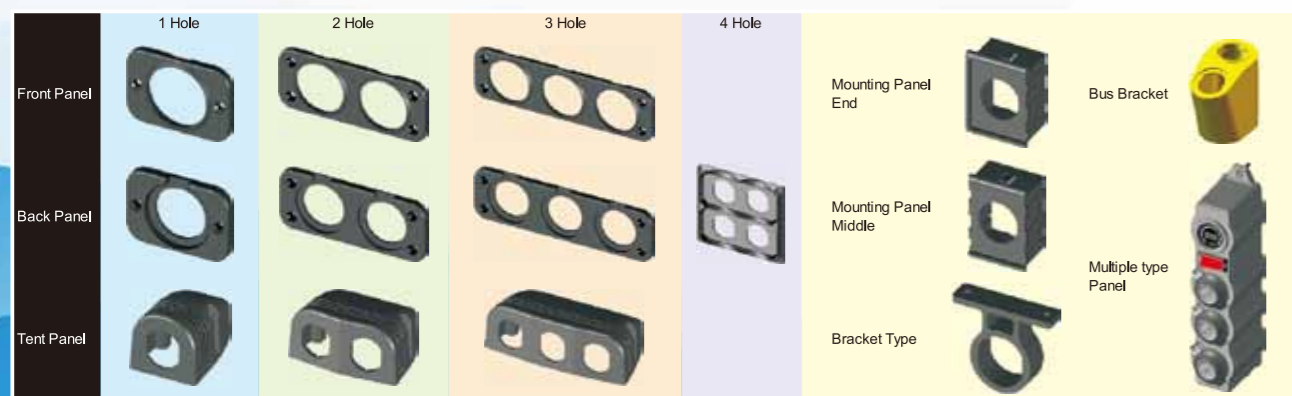

TOP QUALITY AUTO ELECTRIC PRODUCTS CO.,LTD.

No.2, Sin-Ai Road, An-Ping Industrial Park, Tainan, Taiwan 70255
 TEL : +886-6-265-2319 FAX : +886-6-265-2919
 E-mail : top.quality@msa.hinet.net
 http://www.aes-autoparts.com.tw



TOP QUALITY AUTO ELECTRIC PRODUCTS CO.,LTD.



www.aes-autoparts.com.tw