



Automatic Drilling Machine-


Hydraulic Drilling

Pneumatic Drilling

Peck Feed Drilling



Model	P-360A
Max.Drilling Capacity	Ø6mm
Spindle Taper	JT2
Spindle Travel	60mm
Stabilizer Travel	30mm
Spindle Speed	3000.4000.5000
Number Of Speed	3
Swing	360mm
Column Diameter	Ø80mm
Base Diameter	Ø320mm
Table Diameter	330*510mm
Distance From Spindle To Table	400mm
Distance From Spindle To Base	600mm
Motor HP	1/2HP
Overall Height	1350mm
Weight	90kg

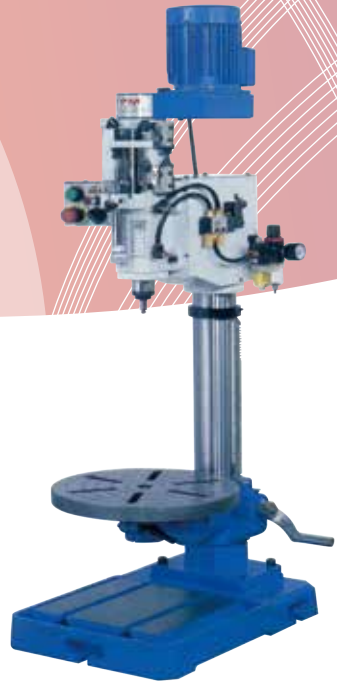

Model	P-360
Max.Drilling Capacity	Ø6mm
Spindle Taper	JT2
Spindle Travel	60mm
Stabilizer Travel	30mm
Spindle Speed	3000.4000.5000
Number Of Speed	3
Swing	360mm
Table Diameter	350*550mm
Column Diameter	Ø80mm
Distance From Spindle To Table	100-400mm
Motor HP	1/2HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1600mm
Weight	210kg

Pneumatic Drilling Machine



Model		P-5100A
Max.Drilling Capacity		Ø10mm
Spindle Taper		JT6
Spindle Travel		100mm
Spindle Speed	3S	1000.2000.3000
Swing		Ø360mm
Table Diameter		450*600mm
Column Diameter		Ø80mm
Distance From Spindle To Table		100-400mm
Motor HP		1HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		1600mm
Weight		260kg



Model	P-5100
Max.Drilling Capacity	10mm
Spindle Taper	ØJT6
Spindle Travel	100mm
Stabilizer Travel	60mm
Spindle Speed	1000.2000.3000
Number Of Speed	3
Swing	Ø360mm
Table Diameter	450*600mm
Column Diameter	Ø80mm
Distance From Spindle To Table	100-400mm
Motor HP	1HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1600mm
Weight	230kg

Model	P-6150
Max.Drilling Capacity	16mm
Spindle Taper	ØMT2
Spindle Travel	150mm
Stabilizer Travel	60mm
Spindle Speed	1000.1500.2000
Number Of Speed	3
Swing	460mm
Table Diameter	600*800mm
Column Diameter	Ø102mm
Distance From Spindle To Table	100-700mm
Motor HP	2HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1800mm
Weight	350kg



Hydraulic Drilling Machine



Model		H-5100
Max.Drilling Capacity		Ø10mm
Spindle Taper		JT6
Spindle Travel		100mm
Spindle Speed	3S	1000.2000.3000
Swing		Ø360mm
Table Diameter		450*600mm
Column Diameter		Ø80mm
Distance From Spindle To Table		100-400mm
Motor HP		1HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		1600mm
Weight		260kg



Model		H-6150
Max.Drilling Capacity		Ø16mm
Spindle Taper		MT2
Spindle Travel		150mm
Spindle Speed	3S	1000.1500.2000
Swing		460mm
Table Diameter		600*800mm
Column Diameter		Ø102mm
Distance From Spindle To Table		100-700mm
Motor HP		2HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		1800mm
Weight		380kg

Model		H-2000
Max. Drilling Capacity		Ø20mm
Spindle Taper		MT3
Spindle Travel		130mm
Spindle Speed	3S	470.790.1280
Swing		Ø460mm
Table Diameter		600*800mm
Column Diameter		Ø92mm
Distance From Spindle To Table		100-700mm
Motor HP		2HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		1900mm
Weight		300kg



Model		H-2500
Max. Drilling Capacity		Ø25mm
Spindle Taper		MT3
Spindle Travel		130mm
Spindle Speed	3S	640.1410.1620
Swing		Ø460mm
Table Diameter		600*800mm
Column Diameter		Ø102mm
Distance From Spindle To Table		100-700mm
Motor HP		2HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		1900mm
Weight		380kg

Hydraulic Drilling Machine



Model		H-7150
Max. Drilling Capacity		Ø25mm
Spindle Taper		ER32 / MT3
Spindle Travel		150mm
Spindle Speed	3S	500.1000.1500
Swing		460mm
Table Diameter		600*800mm
Column Diameter		Ø102mm
Distance From Spindle To Table		350-700mm
Motor HP		2HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		2100mm
Weight		600kg



Model		H-9150
Max. Drilling Capacity		Ø35mm
Spindle Taper		ER40 / MT4
Spindle Travel		150mm
Spindle Speed	3S	100.200.300
Variable Speed		500-2000mm
Swing		520mm
Table Diameter		600*800mm
Column Diameter		Ø115mm
Distance From Spindle To Table		350-700mm
Motor HP		3HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		2100mm
Weight		700kg



Hydraulic Linear Guide Drilling Machine

Model	HL-16
Max. Drilling Capacity in steel	Ø16mm
Spindle Taper	MT2
Spindle Travel	200mm
Head Vertical Travel	200mm
No. Of Spindle Speed	3
Spindle Speed	60HZ 710/1450/2860 50HZ 590/1200/2380
Square Column Diameter	130x140x800mm
Max. Distance Spindle To Table	520mm
Min. Distance Spindle To Table	320mm
Distance Spindle To Column	185mm
Surface Of Table	300x300mm
Motor HP	1HP
Overall Dimension LxWxH	800x630x720mm



Model	HL-25
Max. Drilling Capacity in steel	Ø25mm
Spindle Taper	MT3
Spindle Travel	300mm
Head Vertical Travel	300mm
No. Of Spindle Speed	3
Spindle Speed	60HZ 510/1220/2000 50HZ 425/1010/1660
Square Column Diameter	180x200x950mm
Max. Distance Spindle To Table	550mm
Min. Distance Spindle To Table	250mm
Distance Spindle To Column	245mm
Surface Of Table	300x450mm
Motor HP	2HP
Overall Dimension LxWxH	980x850x750mm



Pneumatic Peck Feed Drilling Machine



Model	P-30-60A
Max.Drilling Capacity	Ø6mm
Spindle Taper	JT2
Spindle Travel	60mm
Stabilizer Travel	30mm
Spindle Speed	3000.4000.5000
Number Of Speed	3
Swing	360mm
Column Diameter	Ø80mm
Base Diameter	Ø320mm
Table Diameter	330*510mm
Distance From Spindle To Table	400mm
Distance From Spindle To Base	600mm
Motor HP	1/2HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1350mm
Weight	90kg



Model	P-30-60
Max.Drilling Capacity	Ø6mm
Spindle Taper	JT2
Spindle Travel	60mm
Stabilizer Travel	30mm
Spindle Speed	3000.4000.5000
Number Of Speed	3
Swing	360mm
Table Diameter	350*550mm
Column Diameter	Ø80mm
Distance From Spindle To Table	100-400mm
Motor HP	1/2HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1600mm
Weight	210kg



Pneumatic Peck Feed Drilling Machine

Model	P-50-100A
Max.Drilling Capacity	Ø10mm
Spindle Taper	JT6
Spindle Travel	100mm
Stabilizer Travel	60mm
Spindle Speed	1000.2000.3000
Number Of Speed	3
Swing	360mm
Column Diameter	Ø80mm
Base Diameter	Ø320mm
Table Diameter	330*510mm
Distance From Spindle To Table	400mm
Distance From Spindle To Base	600mm
Motor HP	1HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1350mm
Weight	100kg



Model	P-50-100
Max.Drilling Capacity	10mm
Spindle Taper	ØJT6
Spindle Travel	100mm
Stabilizer Travel	60mm
Spindle Speed	1000.2000.3000
Number Of Speed	3
Swing	Ø360mm
Table Diameter	450*600mm
Column Diameter	Ø80mm
Distance From Spindle To Table	100-400mm
Motor HP	1HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1600mm
Weight	230kg

Pneumatic Peck Feed Drilling Machine



Model	P-60-150
Max. Drilling Capacity	16mm
Spindle Taper	ØMT2
Spindle Travel	150mm
Stabilizer Travel	60mm
Spindle Speed	1000.1500.2000
Number Of Speed	3
Swing	460mm
Table Diameter	600*800mm
Column Diameter	Ø102mm
Distance From Spindle To Table	100-700mm
Motor HP	2HP
Pneumatic Power kg/cm ²	5kg/cm ²
Overall Height	1800mm
Weight	350kg





Hydraulic Peck Feed Drilling Machine

Model		H-50-100
Max.Drilling Capacity		Ø10mm
Spindle Taper		JT6
Spindle Travel		100mm
Spindle Speed	3S	1000.2000.3000
Swing		Ø360mm
Table Diameter		450*600mm
Column Diameter		Ø80mm
Distance From Spindle To Table		100-400mm
Motor HP		1HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		1600mm
Weight		260kg



Model		H-60-150
Max.Drilling Capacity		16mm
Spindle Taper		MT2
Spindle Travel		150mm
Spindle Speed	3S	1000.1500.2000
Swing		460mm
Table Diameter		600*800mm
Column Diameter		Ø102mm
Distance From Spindle To Table		100-700mm
Motor HP		2HP
Pneumatic Power kg/cm ²		20kg/cm ²
Overall Height		1600mm
Weight		230kg

Hydraulic Peck Feed Drilling Machine



Model		H-70-150
Max. Drilling Capacity		Ø25mm
Spindle Taper		ER32 / MT3
Spindle Travel		150mm
Spindle Speed	3S	500.1000.1500
Swing		460mm
Table Diameter		600*800mm
Column Diameter		Ø102mm
Distance From Spindle To Table		350-700mm
Motor HP		2HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		2100mm
Weight		600kg



Model		H-90-150
Max. Drilling Capacity		Ø35mm
Spindle Taper		ER40 / MT4
Spindle Travel		150mm
Spindle Speed	3S	100.200.300
Variable Speed		500-2000mm
Swing		520mm
Table Diameter		600*800mm
Column Diameter		Ø115mm
Distance From Spindle To Table		350-700mm
Motor HP		3HP
Hydraulic Power kg/cm ²		20kg/cm ²
Overall Height		2100mm
Weight		700kg




Hydraulic Linear Guide Peck Feed Drilling Machine

Model	HL-16-200
Max. Drilling Capacity in steel	Ø16mm
Spindle Taper	MT2
Spindle Travel	200mm
Head Vertical Travel	200mm
No. Of Spindle Speed	3
Spindle Speed	60HZ 710/1450/2860 50HZ 590/1200/2380
Square Column Diameter	130x140x800mm
Max. Distance Spindle To Table	520mm
Min. Distance Spindle To Table	320mm
Distance Spindle To Cloumn	185mm
Surface Of Table	300x300mm
Motor HP	1HP
Overall Dimension LxWxH	800x630x720mm



Model	HL-25
Max. Drilling Capacity in steel	Ø25mm
Spindle Taper	MT3
Spindle Travel	300mm
Head Vertical Travel	300mm
No. Of Spindle Speed	3
Spindle Speed	60HZ 510/1220/2000 50HZ 425/1010/1660
Square Column Diameter	180x200x950mm
Max. Distance Spindle To Table	550mm
Min. Distance Spindle To Table	250mm
Distance Spindle To Cloumn	245mm
Surface Of Table	300x450mm
Motor HP	2HP
Overall Dimension LxWxH	980x850x750mm



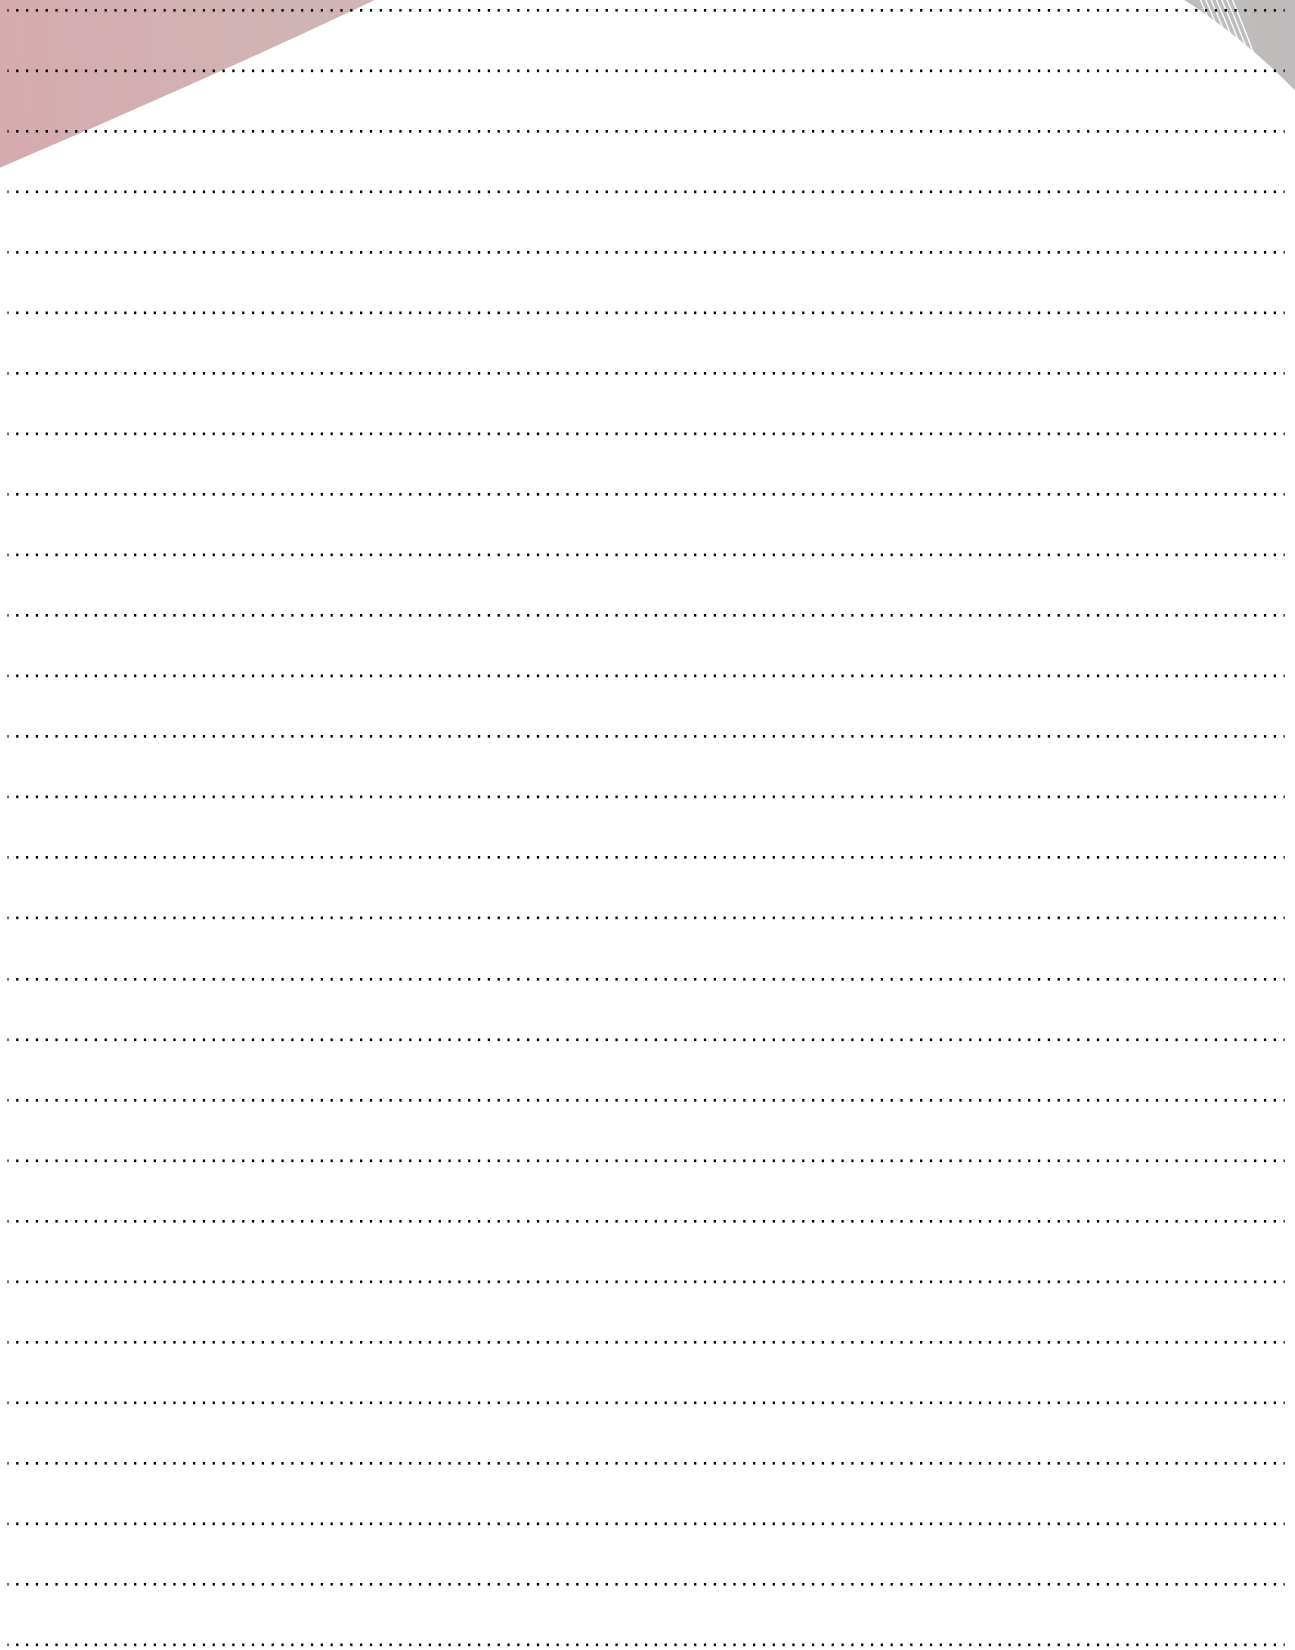

A large white semi-circle occupies the central portion of the page. Inside this semi-circle, there are 25 horizontal dotted lines spaced evenly, providing a guide for handwriting practice.



LAING LIH MACHINE CO., LTD.

TEL:886-4-2560-1100

FAX:886-4-2560-1012

— No. 247, Yasiou Rd., Daya Dist.,
Taichung City 428, Taiwan

E-mail: ktk.kaiwen@msa.hinet.net

▼ 扫描看更多 ▼



<http://www.ktk.com.tw>
<http://www.ktk-machinery.com>