




TAI CHAN MACHINERY INDUSTRIAL CO., Ltd.
established in 1978, specializes in
manufacturing various kinds of machinery
for the woodworking industry. Our Machines
are widely sold overseas market.

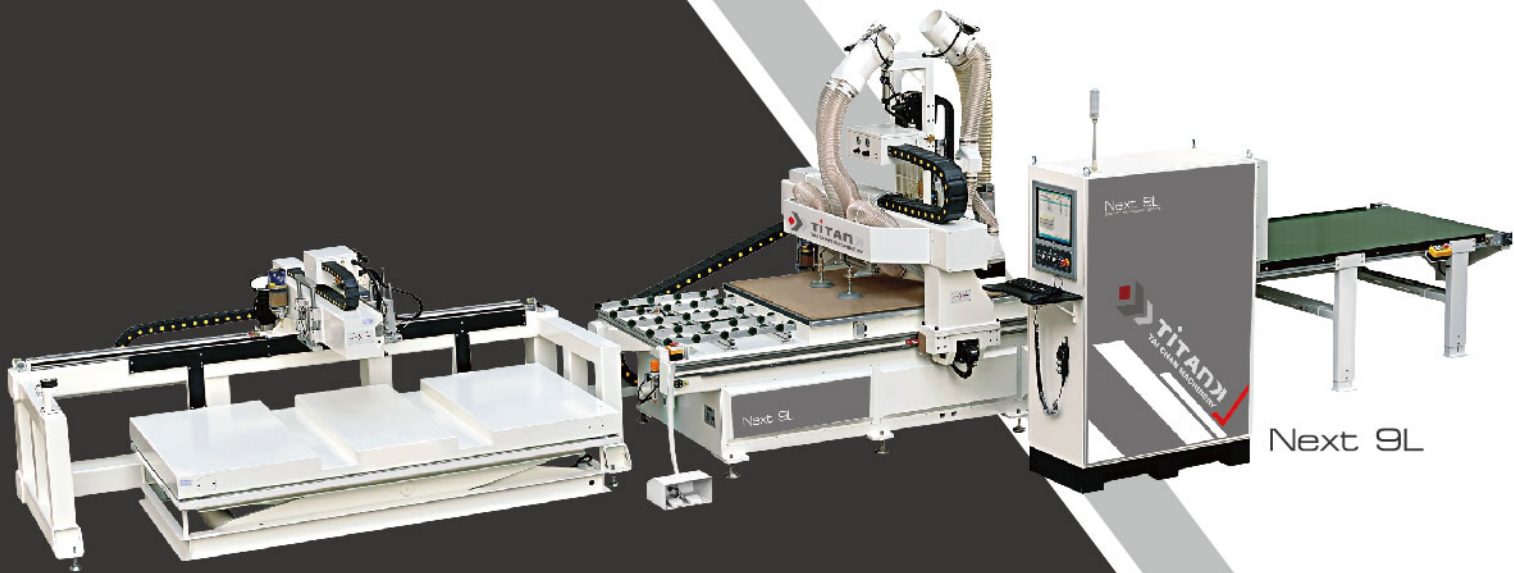

CNC NESTING MACHINE CENTER

Next 9L

A complete range of CNC machining centres
integrated with automatic loading and
unloading system for the control of the
complete work cycle from a single operator



Servis Line ID:
0978956565



YouTube Search:taichann



www.taichann.com



邵展機械工業股份有限公司
TAI CHAN MACHINERY INDUSTRIAL CO., LTD.

台灣42948台中市神岡區福民路113號 No.113, Fumin Rd. Shengang Dist., Taichung City 42948 Taiwan
Tel: +886-4-25615618 · Fax: +886-4-25618339 · E-mail: taichann@ms32.hinet.net



軸行程	X軸：3350mm Y軸：2500mm Z軸：200mm	
工作台	3000×2100mm 格式平台面	
最高移動速度	X軸：70M/min Y軸：70M/min Z軸：20M/min	
加工速度	20M/min	
主軸	數量：1 功率：12KW 刀柄規格：HSK-63F	配有圓盤式8刀位伺服刀庫 最大轉速：24000RPM 夾頭規格：ER32
鑽盒	功率：1.7KW 垂直鑽：10支(6+4)	轉速：4000RPM 最大可安裝鑽徑：Φ35mm
真空泵	數量：2 功率：7.5KW×2	抽風量：160m ³ /h×2
吸塵口	Φ200mm×1，Φ125mm×3	風速要求：35m/s
氣源	壓縮空氣壓力要求：0.6~0.7 MPa 接入管徑：Φ12mm	
電壓	380V. 50HZ. 三相	
總功率	43KW	

Spindle travel	X Axis: 3350mm Y Axis: 2500mm Z Axis: 200mm	
Table size	3000×2100mm, Grid type platform	
Max. travelling speed	X Axis: 70M/min Y Axis: 70M/min Z Axis: 20M/min	
Working speed	20M/min	
Spindle	Q'ty : 1 Power : 12KW Shank : HSK-63F	ATC capacity: 8 Max. rotating speed : 24000 RPM Chuck : ER32
Drill box	Power : 1.7 KW Vertical dills : 10 pcs(6+4)	Rotating speed : 4000 RPM Max. installable drilling diameter : Φ35 mm
Vacuum pump	Q'ty : 2 Power : 7.5 KW×2	Air extraction volume : 160 m ³ /h×2
Dust hood outlet	Φ200 mm×1，Φ125 mm×3	Air speed : 35 m/s
Working air pressure	Air pressure requirements : 0.6~0.7 MPa Inlet diameter : Φ12mm	
Voltage	380V. 50HZ. 3PH	
Total power	43KW	