


# C SERIES

## CROSS BELT SANDER

### 橫式砂光機

- \* Automatically sanding process. Manually control is also workable.
- \* Comparing with stroke sander, the sanding quality is consistent.
- \* Capable of creating Hair line, Vibration finish, and Polishing.
- \* 自動化研磨作業，也可手動控制。
- \* 相較傳統手壓砂，砂磨表面更均勻一致。
- \* 可做拉髮絲、亂紋、拋光、打蠟等效果。

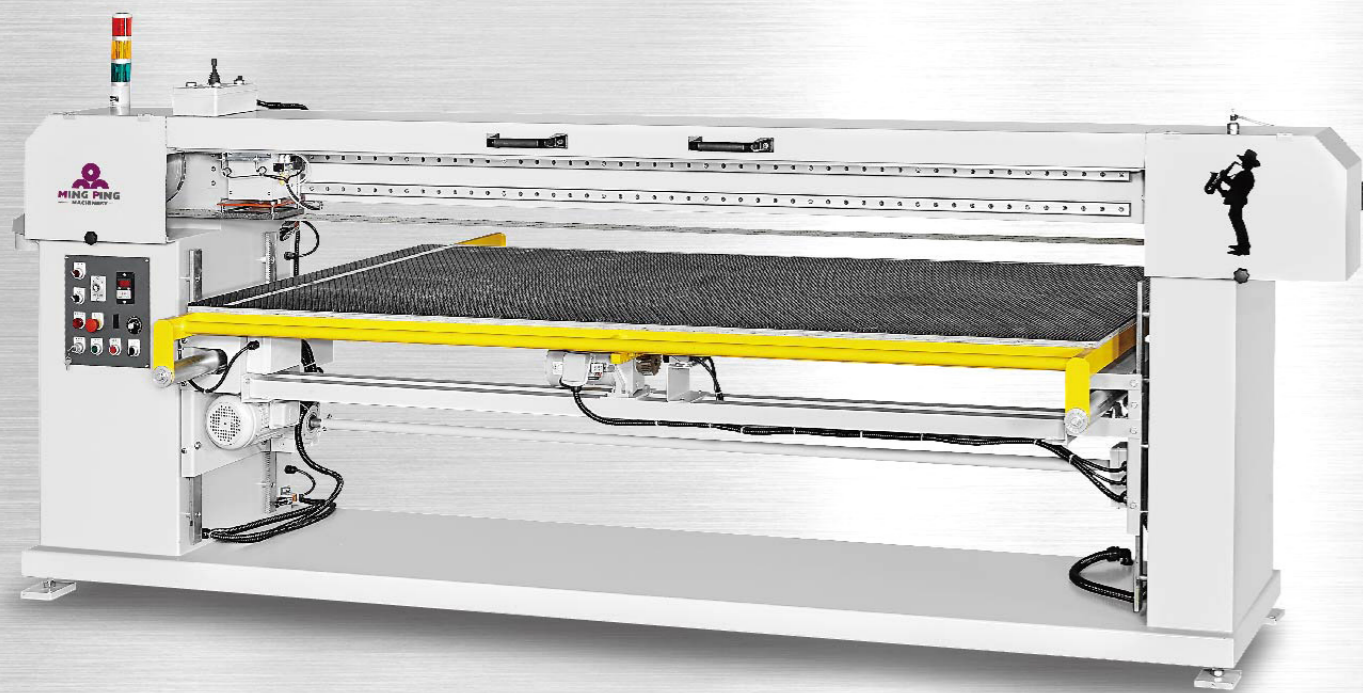

#### SPECIFICATIONS

#### C-1100 / C-2400

Sanding motor	3HP+inverter
Pressure pad motor	1/8HP+inverter
Processing size (mm) (Width x Depth x Height)	1100x1000x350 / 2400x1200x350
Sanding belt length (mm) (Width x Length)	150x4700 / 150x7300

\* We reserve the right to amend any of the above specifications without prior notice.

## QUALITY MADE IN TAIWAN

Ming Ping manufactures locally and thinks globally. We focus on world trend and invest in R&D constantly to obtain a number of domestic and foreign patents. Ming Ping creates for your demand!



www.mingping.com.tw

- DEBURRING 去毛邊
- EDGE ROUNDING 倒圓角
- OXIDE REMOVAL 去氧化層
- DESLAGGING 去熔渣
- HAIR LINE 拉髮絲



## METALWORKING GRINDING MACHINE I / C SERIES

### 名品機械工業有限公司 MING PING MACHINERY CO., LTD.

台灣台中市429006神岡區大富路88號  
No.88, Dafu Road, Shen Kang Dist,  
Taichung City 429006, Taiwan  
TEL: 886-4-25123228  
FAX: 886-4-25120828  
E-mail: sales@mingping.com.tw  
www.mingping.com.tw



DE-DESIGNHOUSE 04-23758797 2021081000



# ITD / IUD SERIES

## 乾式金屬砂光機 DRY SANDING

- \* Applications: steel, stainless steel, aluminium, copper, etc.
- \* Vacuum table with sticky belt allows the processing of small and short parts.
- \* Optionally powerful and effective dust collection.


- \* 適合處理鐵板、不鏽鋼板、鋁板、銅板等。
- \* 獨特真空吸附系統，可加工短料。
- \* 可搭配選購集塵機。

### Available Width:

- 12" 300mm
  - 24" 610mm
  - 36" 915mm
  - 51" 1300mm
- 1 to 5 grinding stations



### Configurations:

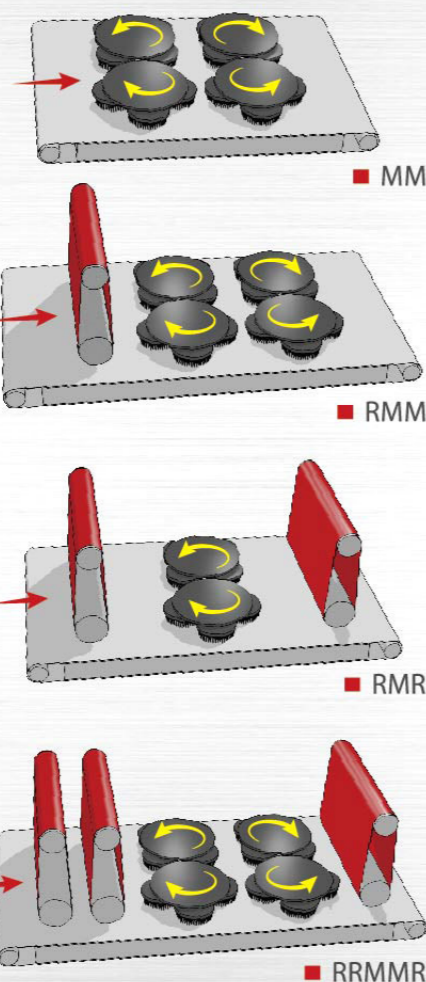

### SPECIFICATIONS

- Head types: Roller, Disc brush
- Sanding belt length: 60"/75"
- Working thickness: 0.5-125mm
- Brush diameter: 150mm
- Feed speed: 2-7.7M/min

### STANDARD EQUIPMENT

- Fixed table or Table adjustable
- Vacuum system
- Touch screen

### OPTIONS

- Polishing roller

## Applications - Deburring & Edge-rounding




Punching  
冲床

Flame cutting  
火焰切割

Laser-cut  
雷射切割

## Applications - Finishing

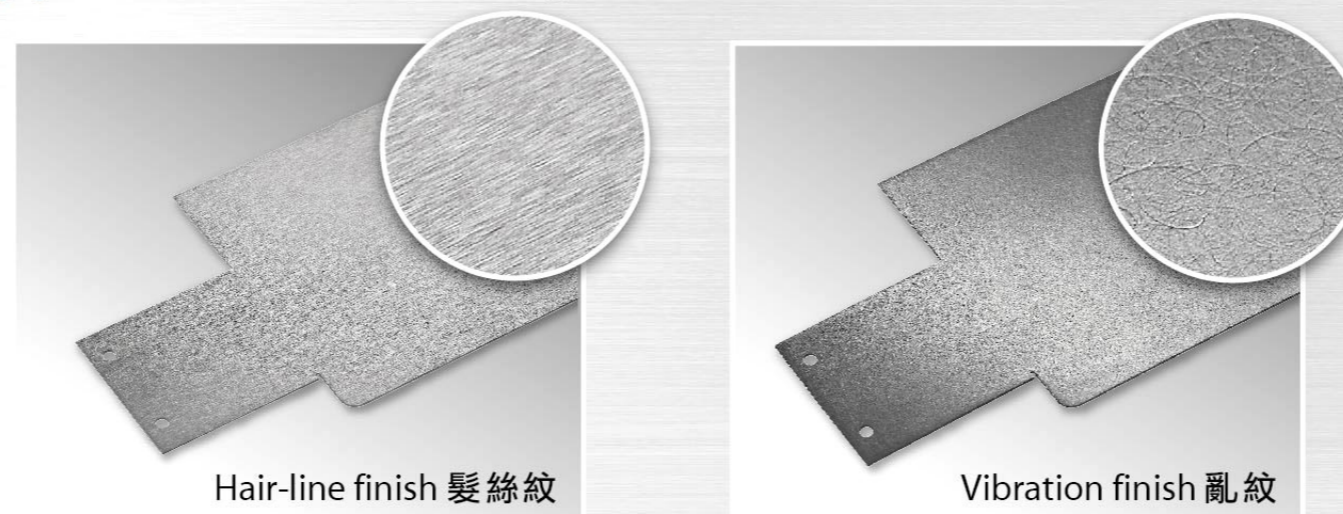

## Disc Brush M / 碟盤

### Advantages:

- \* Planetary disc rotates both main disc and inner brushes.
- \* Reach all points even inner contours without damaging the belt.
- \* Foiled part is able to be processed.
- \* Easy and simple to change with Quick-release system.
- \* Different choices of brushes depend on your requirement.

- \* 行星式碟盤，外轉+內轉增進研磨效率。
- \* 能深入工件輪廓，且不易磨損輸送帶。
- \* 表面貼膜的產品也可以加工。
- \* 碟刷快拆設計，不須工具也能輕易更換。
- \* 根據加工需求，可更換不同材質碟刷。



# IUW SERIES

## 濕式金屬砂光機 WET SANDING

- \* Ideal for all applications and especially for inflammable metal parts.
- \* Avoid excessive material heating and extend the sanding belt life time.
- \* Water-cooling system includes filter and recirculated device.

- \* 適合各種金屬材質加工，尤其針對易燃金屬。
- \* 濕式加工有效降低研磨高溫，減少砂紙磨耗及工件的熱變形。
- \* 水冷系統配備過濾機和水循環裝置。

### Available Width:

- 24" 610mm
- 36" 915mm
- 51" 1300mm



### SPECIFICATIONS

- Head types: Roller, Disc brush
- Sanding belt length: 75"
- Working thickness: 1-125mm
- Brush diameter: 150mm
- Feed speed: 2-7.7M/min

### STANDARD EQUIPMENT

- Fixed table
- Water-cooling system
- Pre-drying system

### OPTIONS

- Magnetic table for ferrous material