

JT-200A 手提式倒角機 1HP





MODEL

JT-200A

Space requirement	360mm x 200mm x 260mm
N.W. / G.W.	11kgs / 13kgs
Voltage	220V~440V, 3 Phase, 50Hz/60Hz
Speed	3500 r.p.m.
Length of guide rails	200mm
Height of bevel	0~7mm
Horsepower	1HP
Packing	40.5cm x 30cm x 30cm
Blade Size	SPUN1203 X 9pcs
Track Size	200mmx78mmx9mm, 200mmx45mmx9mm

特點 Features :

- A. 采用側銑刀原理，刀片(共九片)替換迅速。
 - B. 適用於任何金屬材料倒角作業。
 - C. 軌道座可作15度~45度調整，倒角後工件可成15度~45度面的不同需求。
 - D. 倒角能力為0~7C，45度斜邊約10mm寬。
- A. Adopt with side mill cutting. Quick exchange for knife insert.
 - B. Any metal materials are available for chamfering.
 - C. Swivel track for adjusting, the range from angle 15°~45° degree.
 - Chamfered with side 15°~45° degree for matching different requirement.
 - D. The chamfering ability 0~7C, 0~10mm/45°.



JT-250GS 手提式倒角機 2HP





MODEL

JT-250GS


Accessory	Side mills D59xD22x11.3mmx2pcs
N.W. / G.W.	24kgs / 27kgs
Voltage	220V~440V, 3 Phase, 50Hz/60Hz
Speed	3500 r.p.m.
Capacity	0~14C, 0~20mm/45°
Bevel angle	15°~45°
Moto	2HP
Box size	55cm x 42cm x 32cm
Blade Size	SEKT1203 x 12pcs
Track Size	250mmx75mmx9mm, 250mmx50mmx9mm

特點 Features :

- A. 採用側銑刀原理，刀片(共12片)替換迅速。
 - B. 適用於任何金屬材料倒角作業。
 - C. 軌道座可作15度~45度調整，倒角後工件可成15度~45度面的不同需求。
 - D. 倒角能力為0~14C，45度斜邊約20mm寬。
- A. The side cutter can be replaced quickly,based on side milling principle tip have twelve pieces.
 - B. The machine is use to carry out chamfering operations,on any kind of ferrous materials.
 - C. Working table can swivel angle from 15°~45°.
 - D. The chamfering ability 0~14C, 0~20mm/45°.




JT-R6 手提式倒角機



特點 Features :

- A. 快速便利予解決角度的增加與調整。
 - B. 可切換速度用於各種材質加工。
 - C. 使用標準三角刀片。
 - D. 可快速更換30°與45°不同角度刀頭。
- A. The quick and convenient solution for adding bevels and deburring.
 B. Variable speed for working with a variety of materials.
 C. Uses standard triangle carbide inserts.
 D. Fast replacement for different cutter from 30° and 45°.

MODEL		JT-R6
Motor	1200W	
Voltage	110V/220V, 1Phase, 50Hz/60Hz	
Speed	3000~6000 r.p.m	
Bevel angle	45°(optional 30°)	
Max.bevel height (45 deg.)	6mm	
Min diameter for inside bevels	20mm	
N.W.	4.6Kgs(10.12Lbs)	
Track Size	58cm x 37cm x 24cm	
Blade Size	TCMT16T3 08	

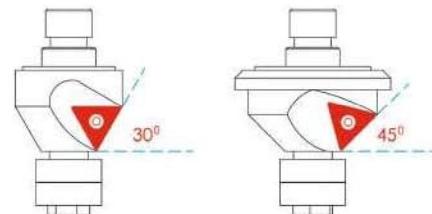

JT-12C 自走式倒角機



特點 Features :

- A. 可用於各種金屬板材如：碳鋼、不鏽鋼、鋁、銅等。
 - B. 倒角加工快速，每分鐘切削速度可達2500~3000mm以上。
 - C. 不需切削油或冷卻油，不污染加工面。
 - D. 適用於各種大小板材，大板材可以使倒角機自走加工遷就工作物，小板材倒角機固定工作物遷就機器。
 - E. 操作方便，僅用一支固定鉗手就可以調整機器的各項功能。
 - F. 結構堅固耐久不變型。
- A. Works with steel, stainless steel, aluminum, copper, plastic and other materials.
 B. The quick for cutting speed, each minute cutting speed above 2500~3000mm.
 C. Without cuts and coolant oil and does not pollute the machined surface.
 D. Apply to materials of any size. Big materials, the machine self-propelled giving to working.
 Small materials, to fix works giving to machines.
 E. The easy to adjusts each function by one fixed wrench.
 F. Ultra strong the design structural of durable does not distort.