



Why Wait

多功能 專利 風槍 2.0



2017台北 AMPA 創新產品獎-銅牌獎
2017 Taipei AMPA - Bronze Medal

Multi-functional Air Blow Gun 2.0



- 免手壓
- 可調風
- 滑動風暴噴頭

- Free from long pressing
- Volume adjustable
- Nozzle slidable

台灣 Taiwan: M499259、M506656
大陸 China: 201520323684.9
美國 USA: 14/594,441、15/243,890
歐盟 OHIM RCD: 002658484-0001
德國 Germany: 202016104724.2
日本 Japan: 3197968
韓國 Korea: 20-2015-0002171



Video



專利風暴滑動噴頭
Patent High volume Air Nozzle

⊕ MAX ⊖ MIN
風量調整旋鈕
Air volume regulator

包覆式省力把手
省力不易卡鐵屑
Labor-saving trigger

可自行轉開維修
Parts can be disassembled
Easy maintenance

活塞式設計解決因
風壓大漏風問題
Piston design
solve leakage problem

扣環設計，免壓不手癢
(附卡榫往上固定往下使用)
Retaining ring design

材質：塑鋼
Material: POM

PG6-12BN



PG6-12FB
傳統型可調風槍
Traditional type air blow gun
(with air volume regulator)

測試壓力 Test Pressure

280 PSI (20KG/CM²)



PGH-06
槍架鎖固處
Holder lock point



槍架使用範例直角處
例如：工作檯、工具車
at angles:
Workbenches,
tool carts



平面處 例如：牆壁
at sides: walls



專利風槍
Patent Air
blow gun 2.0

👍 構造重新設計/ Construction Redesigned

- 長閉式設計、可承受高壓、解決漏風問題
- 活塞式設計、手把超省力、零件可拆解維修
- Normally closed design withstands high air pressure and prevents leakage
- Pistone type, labor-saving trigger, components can be disassembled and repaired



- 三倍風量
- 一隻風槍擁有多種功能
- Turbo air volume
- Multi-functions in One



可調風量
Volume adjustable



扣環設計
(不壓板手自動吹拂)
Retaining ring
(free from long pressing)

傳統風槍
Traditional
Air blow gun

✗ 傳統缺點/ Weakness

- 因老舊風壓大即漏風，浪費電力
- 彈簧式手壓費力、損壞即丟，浪費資源成本
- When air blow gun becomes worn, leakage occurs and electricity waste in high air pressure
- Spring type is laborous and easily broken, which increases cost and wastes energy



- 需額外買大風量功能風槍
- 需額外買噴霧功能風槍
- High volume needed, buy extra air blow gun
- Spray needed, buy extra spray gun



有些可調
有些不可
Some have
and some
do not



無扣環長按費力
No retaining
ring

噴頭系列產品 Nozzle Series



風暴噴頭 / Turbo air nozzle

High volume **Cost reduction**



風槍附上風暴噴頭
Air blow gun attach turbo air nozzle





霧化噴頭 / Spray nozzle

霧化各式液體
可用於清潔、潤滑等
Atomization liquids
for cleaning/lubrication




傳統風槍附上霧化噴頭
Traditional air blow gun attach spray nozzle

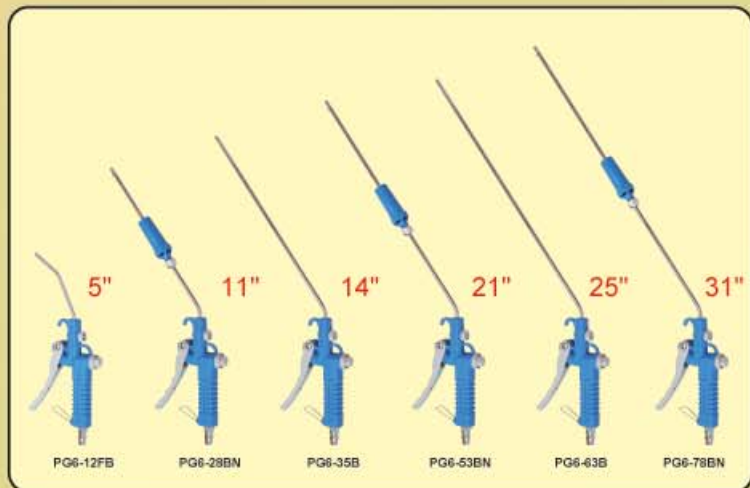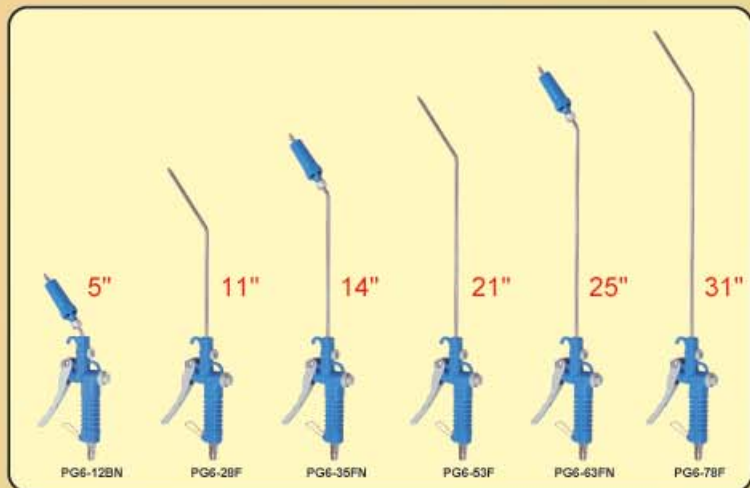

漏氣可更換 O-RING
Replace O-rings if leakage occurs

省下成本 / Cost Reduction

O-RING	規格 (內徑 x 厚度) Specification (internal diameter x width)
P5	4.8x1.9
P6	5.8x1.9
14x2	14x2

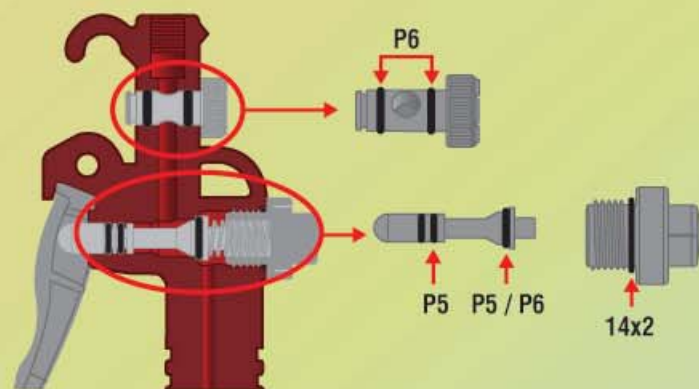

內部構造剖面圖
Sectional View

風槍噴管管徑有
Ø6mm 與 Ø8mm 兩種規格
Two kinds of pipe:
Ø6mm & Ø8mm

各種型式規格的风槍泡殼包裝
Various type of package



附加 1/8" 接頭可更換
不同長度與管徑形式的噴管
With 1/8" connector
You can alternate
different length and
diameter of pipes



PG6-12FB



PG6-12BNH



PG6-12BNA

樺偉機械有限公司
台中市霧峰區新厝路261巷10弄5號
電話: 04-2333-0640 傳真: 04-2333-0539
<http://www.whywait-tw.com>
<http://www.whywait.com.tw>

Why Wait Machinery Co., Ltd.
No. 5, Alley 10, Lane 261, Hsintsu Rd.,
Wufeng Dist., Taichung City, Taiwan
TEL: +886-4-2333-0640
FAX: +886-4-2333-0539
E-MAIL: whywait@ms57.hinet.net